


ULTIMATE AGM

HEAVY DUTY



12 / 24 MONTH WARRANTY

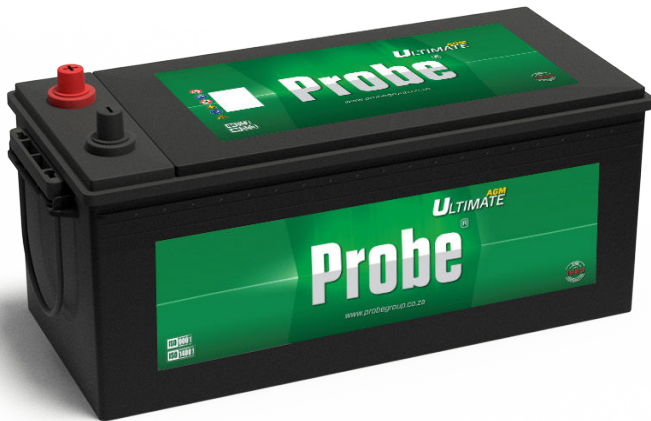

Electrical specification

Voltage:	12V
Capacity C²⁰:	220 Ah
Cold cranking current:	1250 CCA [SAE]
Reserve Capacity:	500 min

Mechanical specification

Dimensional group:	C
ETN reference:	695AGM
Dimensions^A in mm (LxWxH):	514x274x242
Cell Layout:	4
Terminal Type:	A

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat VRLA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	VRLA
	Colour	Black

Handles	Material	Polypropylene
	Position	Side - on container
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V3/V4	E3/M3

Weight^B

Battery weight in kg:	46.80
Acid weight in kg:	13.50
Total battery weight in kg:	60.30

Layout

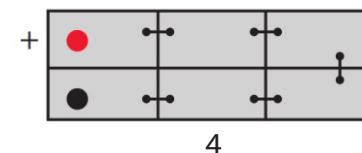

Hold-down



Separator

Type	AGM
-------------	------------

- A.** Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B.** Weight may vary ±5%.