



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	200 Ah
Cold cranking current:	1200 CCA [SAE]
Reserve Capacity:	410 min

Mechanical specification

Dimensional group:	C
ETN reference:	695D
Dimensions ^A in mm (LxWxH):	514x276x242
Cell Layout:	4
Terminal Type:	A

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

Weight^B

Battery weight in kg:	33.20
Acid weight in kg:	20.20
Total battery weight in kg:	53.40

Layout

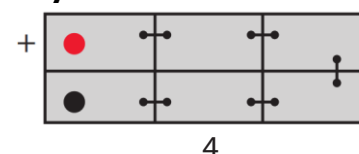

Hold-down



Separator

Type	PE with Glass Mat
------	-------------------

- ^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
^{B.} Weight may vary ±5%.