



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	50 Ah
Cold cranking current:	440 CCA [SAE]
Reserve Capacity:	75 CCA [SAE]

Mechanical specification

Dimensional group:	D23
ETN reference:	622USH
Dimensions ^A in mm (LxWxH):	260x170x220
Terminal Polarity:	1
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B1
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V1	E2

Weight^B

Battery weight in kg:	8.30
Acid weight in kg:	5.60
Total battery weight in kg:	13.90

Layout

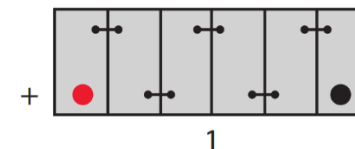

Hold-down



Separator

Type	PE
------	----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.