



## Electrical specification

Voltage:	12V
Capacity C <sup>20</sup> :	62 Ah
Cold cranking current:	600 CCA [SAE]
Reserve Capacity:	100 CCA [SAE]

## Mechanical specification

Dimensional group:	L2
ETN reference:	646AFB
Dimensions <sup>A</sup> in mm (LxWxH):	242x175x190
Terminal Polarity:	2
Terminal Type:	1

## Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	GREY

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	GREY


## Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M1


## Weight<sup>B</sup>

Battery weight in kg:	11.60
Acid weight in kg:	5.20
Total battery weight in kg:	16.80

## Layout

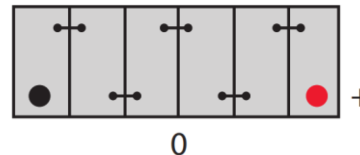

## Hold-down



## Separator

Type	PE
------	----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.