



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	180 Ah
Cold cranking current:	1200 CCA [SAE]
Reserve Capacity:	360 CCA [SAE]

Mechanical specification

Dimensional group:	B
ETN reference:	696EFB
Dimensions ^A in mm (LxWxH):	513x223x223
Terminal Polarity:	4
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Blue

Lid	Material	Polypropylene
	Cover design	SMF with ME
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V3	E3

Weight^B

Battery weight in kg:	33.45
Acid weight in kg:	13.30
Total battery weight in kg:	46.75

Layout

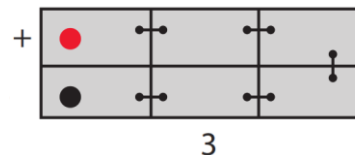

Hold-down



Separator

Type	PE
------	----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.